



## MAXIMUM CAPACITY, MINIMUM MOTOR LOAD FOR LONG LIFE AND SUPERIOR EFFICIENCY

Sterlco® Centrifugal Pumps are designed so the motor shaft will not be exposed to water. Provisions for seal flush or vent are provided. The pumps are close-coupled to a 3450 RPM motor (open drip-proof, totally enclosed, or explosion-proof).

### Features

- “Sterl-Seal” ceramic pump seal
- Impeller is brass for long life. Efficient design provides maximum capacity, minimum motor load
- Heavy-duty cast iron pump housing and bracket assure rigidity and long life
- Flat perforated brass strainer in pump inlet prevents clogging (vertical application only)
- 1/3, 1/2 and 3/4 HP
- 3/4" NPT Discharge
- Stainless steel motor shaft

### Sample Specification

A Sterlco® (G Series) centrifugal pump shall be furnished (and installed as shown on the plan). It will have a capacity of \_\_\_\_ GPM @ \_\_\_\_ feet total head pressure, without overloading the motor. The pump shall be designed so that the motor shaft will not be exposed to water. Provisions for a seal flush or vent shall be provided. The pump shall be close-coupled to 3450 RPM, (open drip-proof, totally enclosed or explosion-proof) motor of \_\_\_\_ HP, \_\_\_\_ phase, \_\_\_\_ cycle and \_\_\_\_ volt. The pump shall allow the motor and impeller to be removed without disturbing the piping connections.

## CENTRIFUGAL PUMPS FOR G SERIES CONDENSATE AND BOILER FEED PUMPS



**BESTOBELL**  
**AQUATRONIX**  
SINCE/DEPUIS 1953

**Head Office**  
2880 Argentia Road, Unit 3  
Mississauga, ON L5N 7X8  
salesdesk@bestobell.com  
1-800-668-3979  
www.bestobell.com

**Montréal Office**  
970 Montée de Liesse, #204  
St.Laurent, QC H4T 1W7  
ventes@bestobell.com  
1-877-331-1225


**Atlantic Office**  
166 North Side Road  
Riverport, NS B0J 2W0  
dmossman@bestobell.com  
902-529-0355







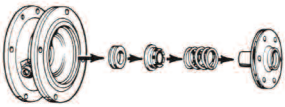


*Since 1953, Quality Products to Sense, Measure & Control  
Depuis 1953, Produits De Qualités Pour Détecter, Mesurer & Contrôler*

# G SERIES



- |                 |                    |                        |                           |
|-----------------|--------------------|------------------------|---------------------------|
| 1 Motor         | 4 Tube fitting     | 7 Rotary Seal Assembly | 10 Housing Gasket         |
| 2 Water Slinger | 5 Motor Screws (4) | 8 Impeller             | 11 Pump Housing           |
| 3 Motor Bracket | 6 Pump screws (4)  | 9 Impeller Screw       | 12 Threaded Inlet Casting |

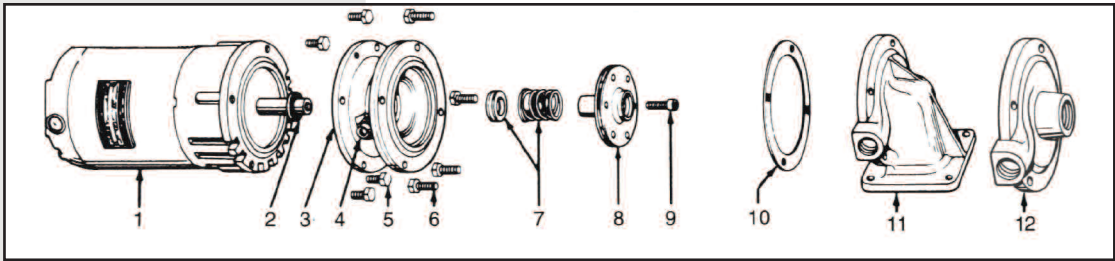

REMOVAL OF OLD SEAL ASSEMBLY	INSTALLATION OF NEW SEAL ASSEMBLY
 <p><b>A)</b> Remove pump housing from motor bracket and impeller assembly by removing pump screws.</p>	 <p><b>F)</b> Coat outside edge of new seat with seal lubricant and slip it into the bracket. Press into bracket with thumbs or wooden dowel. Handle seat carefully so seating surfaces are not scratched or chipped...be sure it is squarely seated.</p>
 <p><b>B)</b> Remove impeller screw and motor screws. (Note: opposite end of motor shaft is fitted with screwdriver slot to hold shaft securely while impeller screw is being removed).</p>	 <p><b>G)</b> Remount bracket on motor</p>
 <p><b>C)</b> Insert two of the pump screws into the two threaded holes in the bracket. Tighten them slowly and evenly to force the impeller and bracket off the shaft. <b>Do not pry the impeller or bracket!</b></p>	 <p><b>H)</b> Lubricate impeller hub with seal lubricant. Slip new bellows and spring onto impeller hub. Be sure bellows slides freely on impeller hub.</p>
 <p><b>D)</b> Remove old seal parts from impeller hub and bracket. Be sure water slinger is in place.</p> <p><b>E)</b> Clean impeller hub thoroughly...remove all loose particles of dirt, grease, etc. Also clean the recess in the bracket so the new seat will fit perfectly. Remove all particles and dirt on gasket surfaces of the two castings.</p>	 <p><b>I)</b> Replace impeller on motor shaft and secure with impeller screw. Hold shaft with screwdriver slot while tightening screw.</p>
	 <p><b>J)</b> Replace pump housing onto bracket, using a new housing gasket. Secure with pump screws. Be certain gasket is seated properly.</p>



**Sterling New Berlin**  
 2900 S 160th Street  
 New Berlin, WI 53151 USA  
 Tel: 262-641-3808/888-777-4085  
 Fax: 262-641-8625  
[www.steamcontrolproducts.com](http://www.steamcontrolproducts.com)



**STERLCO® PRODUCTS INCLUDE:**

- HAND RADIATOR VALVES • THERMOSTATIC TRAPS • FLOAT AND THERMOSTATIC TRAPS
- INVERTED BUCKET TRAPS • CAST IRON STRAINERS • BRASS STRAINERS • BOILER FEED UNITS
- TANK AND PROCESS TEMPERATURE CONTROL VALVES • CONDENSATE PUMPS



SINCE / DEPUIS 1953  
**BEP-Bestobell**  
[www.bestobell.com](http://www.bestobell.com)