

SonoPro® Portable Transit Time Clamp-On Ultrasonic Flowmeter (Model U44)

BESTOBELL
AQUATRONIX
SINCE / DEPUIS 1953

BEP-Bestobell
www.bestobell.com



VorTek Instruments SonoPro® Portable clamp-on flowmeter incorporates high accuracy transit-time ultrasonic technology to deliver accurate and reliable flow metering. The innovative design includes matched precision transducers and signal processing circuitry to accurately measure the flow of most liquids over a wide range of velocities. Clamp-on transducers create no wear, zero pressure loss, and do not require process interruptions to install them since they are attached to the outside of the pipe. With the addition of external temperature inputs, SonoPro Portable can provide a reliable (BTU) energy measurement.



VorTek
INSTRUMENTS

VorTek Instruments, LLC
8475 West I-25 Frontage Rd., Suite 300
Longmont, CO 80504 USA
Tel: 303/682-9999 Fax: 303/682-4368
info@vortekinst.com

Specifications

Performance

Velocity Range	±0.03 ft/s ~ ±40 ft/s (±0.01 m/s~ ±12 m/s)
Accuracy	±1% of reading
Repeatability	0.2%
Pipe size	1"~ 48"(25mm ~ 1200mm)
Fluid	Clean liquids with little to no air bubbles or particles

Function


Outputs	Analog output: 4 ~ 20 mA, max load 750 Ω. Modbus: RS485
Memory	SD Card (16GB)
Display	240*128 back lit LCD
Power supply	Rechargeable Lithium Battery Power, 3000mAh (16 hour battery life under continuous operation)
Transmitter Temperature	-40°F - 140°F (-40°C - 60°C)
Humidity	Up to 99% RH, non-condensing

Physical


Transmitter Enclosure Rating	NEMA13, IP54
Transducer Enclosure Rating	Encapsulated design, IP68
Transducer cable	Standard cable length: 5m (16ft).

Physical Specifications

Transmitter

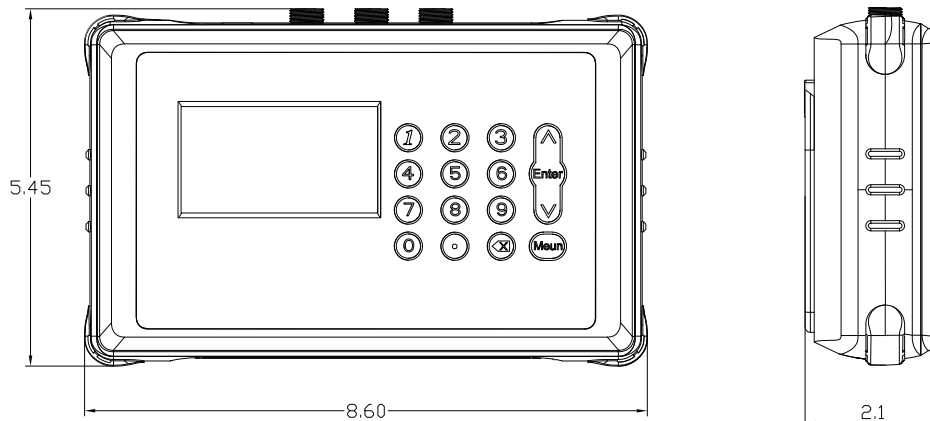

Transducer

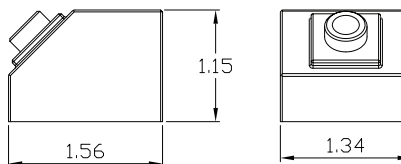


All dimensions in inches



Vortek
INSTRUMENTS

Measuring Principle

Transit-time ultrasonic flowmeters measure the time from when a signal is transmitted from the first transducer until the second transducer receives it. Time measurements are taken in both directions, with and against the flow. If there is no flow in the pipe, the time measurements will be the same in both directions. With flow in the pipe, the sound waves will move faster traveling with the flow and slower traveling against the flow. The liquid velocity is calculated from the difference in these two time measurements. With the area of the pipe and velocity known, the meter can calculate the volumetric flow rate.

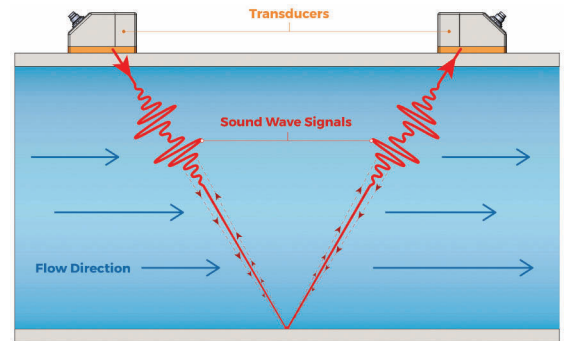

Included Accessories



- Carrying Case
- Handheld Transmitter
- Transducers (Pair)
- Transducer Mounting Bracket
- Transducer Mounting Bracket Pipe Straps (Pair)
- Acoustic Coupling Grease
- Battery Charger
- Output Cable
- Measuring Tape

Model Number Information

Model	Description
U44	Portable Ultrasonic Flow Meter
	Velocity Range: ± 0.03 ft/s ~ ± 40 ft/s (± 0.01 m/s ~ ± 12 m/s)
	Accuracy: $\pm 1\%$ of Reading
	Repeatability: 0.2%
	Output: 4-20mA, RS485
	Internal lithium power supply: 3000mAh (16 hour battery life under continuous operation)
Pipe size range: 1" ~ 48" (25mm~1200mm)	
Code	Model
1	Volumetric Flowmeter for Liquids
2	Volumetric & Energy (BTU) Flowmeter for Liquids
Code	Transducers
D1	Clamp-on, IP68. Operating temperature: -40°F ~ $+176^{\circ}\text{F}$ (-40°C ~ $+80^{\circ}\text{C}$)
D1U	Clamp-on, IP68. Operating temperature: -40°F ~ $+266^{\circ}\text{F}$ (-40°C ~ $+130^{\circ}\text{C}$)
W1	Insertion, IP68. Operating temperature: -40°F ~ $+266^{\circ}\text{F}$ (-40°C ~ $+130^{\circ}\text{C}$)
Code	Transducer Mounting Bracket
DT	Dual Guide Mounting Bracket
Code	Transducer Cable Length
P5	Standard Cable - 16 ft (5 m) Length
PXX	Custom cable length. Maximum length is 100 ft (30m)
Code	Temperature sensor
PT1000	Pair of clamp-on PT1000 temperature sensors. 30 ft (9m) cable length

Volumetric Flowmeter Model (example)

U44-1-D1-DT-P5

Portable Volumetric Flowmeter, D1 type transducers 5m cables with dual guide mounting bracket.

Volumetric & Energy (BTU) Flowmeter Model (example):

U44-2-D1-DT-P5-PT1000

Portable volumetric & energy (BTU) flowmeter, D1 type transducer 5m cables with dual guide type mounting track. A pair of PT1000 clamp on temperature sensors, 9m cable length

BESTOBELL
AQUATRONIX
SINCE/DEPUIS 1953

Head Office

2880 Argentia Road, Unit 3
Mississauga, ON L5N 7X8
salesdesk@bestobell.com
1-800-668-3979
www.bestobell.com

Montréal Office
970 Montée de Liesse, #204
St.Laurent, QC H4T 1W7
ventes@bestobell.com
1-877-331-1225

Atlantic Office
166 North Side Road
Riverport, NS B0J 2W0
dmossman@bestobell.com
902-529-0355

*Since 1953, Quality Products to Sense, Measure & Control
Depuis 1953, Produits De Qualités Pour Détecter, Mesurer & Contrôler*

